

FOS 100 DYNAMIC FC



User's Manual rel 2.1 **GB**

D.T.S. Illuminazione s.r.l. - ITALY
<http://www.dts-lighting.it>



The Lighting Company

Made in Italy

Le informazioni contenute in questo documento sono state attentamente redatte e controllate. Tuttavia non è assunta alcuna responsabilità per eventuali inesattezze. Tutti i diritti sono riservati e questo documento non può essere copiato, fotocopiato, riprodotto per intero o in parte senza previo consenso scritto della D.T.S .

D.T.S si riserva il diritto di apportare senza preavviso cambiamenti e modifiche estetiche , funzionali o di design a ciascun proprio prodotto. D.T.S non assume alcuna responsabilità sull'uso o sull'applicazione dei prodotti o dei circuiti descritti.

The information contained in this publication has been carefully prepared and checked. However, no responsibility will be taken for any errors. All rights are reserved and this document cannot be copied, photocopied or reproduced, in part or completely, without prior written consent from D.T.S. D.T.S. reserves the right to make any aesthetic, functional or design modifications to any of its products without prior notice. D.T.S. assumes no responsibility for the use or application of the products or circuits described herein.

Les informations contenues dans le présent manuel ont été rédigées et contrôlées avec le plus grand soin. Nous déclinons toutefois toute responsabilité en cas d'éventuelles inexactitudes. Tous droits réservés. Ce document ne peut être copié, photocopié ou reproduit, dans sa totalité ou partiellement, sans le consentement préalable de D.T.S.

D.T.S. se réserve le droit d'apporter toutes modifications et améliorations esthétiques, fonctionnelles ou de design, sans préavis, à chacun de ses produits. D.T.S. décline toute responsabilité sur l'utilisation ou sur l'application des produits ou des circuits décrits.

Las informaciones contenidas en este documento han sido cuidadosamente redactadas y controladas. Con todo, no se asume ninguna responsabilidad por eventuales inexactitudes. Todos los derechos han sido reservados y este documento no puede ser copiado, fotocopiado o reproducido, total o parcialmente, sin previa autorización escrita de D.T.S.

D.T.S. se reserva el derecho a aportar sin previo aviso cambios y modificaciones de carácter estético, funcional o de diseño a cada producto suyo. D.T.S. no se asume responsabilidad de ningún tipo sobre la utilización o sobre la aplicación de los productos o de los circuitos descritos.

DESCRIPTION

FOS 100 DYNAMIC FC is a new compact LED bar with power supply on board, designed for colouring large surfaces with a uniform projection, either indoor and outdoor.

FOS 100 DYNAMIC FC can be used for many applications, such as:

- professional, for an ample range of special events;
- theatre and television, for uniform background colours and cycloramas;
- architectural, for lighting building facades, public and commercial spaces, monuments, etc.

All models are made on aluminium offering high resistance to mechanical stress.

Protection rating can be IP65 (outdoor) or IP20 (indoor).

FOS 100 DYNAMIC FC light source is composed of 15 x FULL RGBW LEDs which can independently generate 16 million colours; colour temperature can be controlled linearly from 2700K to 8000K.

The 15 FULL RGBW LEDs can generate the same colour at the same time (so that the illuminated object is not only uniformly lit, but also projects no false shadows) and different colours at the same time (independent control for each FULL RGBW LED in 60 channels mode) in order to create an infinity combination of colours.

Three dedicated lenses sets (Spot, Medium flood and Wide flood) are available for each model, offering different light beam projection angles.

Set-up and connection of the units is fast and easy, thanks to the dedicated on board power supply. FOS 100 DYNAMIC FC can be controlled via any DMX lighting console.

D.T.S. Product codes:

03.DYN007S.F10	FOS 100 SOLO DYNAMIC FC IP65 • Spot lenses • Black finish
03.DYN007S.F25	FOS 100 SOLO DYNAMIC FC IP65 • Medium flood lenses • Black finish
03.DYN007S.F40	FOS 100 SOLO DYNAMIC FC IP65 • Wide flood lenses • Black finish
03.DYN008S.F10	FOS 100 SOLO DYNAMIC FC IP20 • Spot lenses • Black finish
03.DYN008S.F25	FOS 100 SOLO DYNAMIC FC IP20 • Medium flood lenses • Black finish
03.DYN008S.F40	FOS 100 SOLO DYNAMIC FC IP20 • Wide flood lenses • Black finish

All models are also available in grey silver finish.

LED technology

15 x FULL RGBW LEDs; 6720 Lumens

16 million colours; linear colour temperature 2700K ÷ 8000K; 16 selectable types of White

LEDs average lifespan: 75.000 hours (70% lumen output)

Optical units

3 lenses sets available (Spot, Medium flood, Wide flood)

Control

DMX 512

Protection

IP20 or IP65 protection level against the penetration of solids and liquids

Construction

FOS 100 DYNAMIC is made on extruded aluminium

Power supply

Electronic full range: 90-260Vac 50-60 Hz

Power consumption

150W Max

Operating ambient temperature

-10° / 40°

Weight

6,5 Kg

IMPORTANT SAFETY INFORMATION

Fire prevention:

It is permissible to place the unit on normally flammable surfaces.

Suitable for mounting on normally flammable materials surfaces greater than 200°C with some combustion time lag.

Prevention from electric shock:

High voltage is present inside the unit.

Unplug the unit prior to performing any operation which involves touching the inside of the unit.

This equipment must be grounded, do not connect to non-grounded supplies.

The use of a thermal magnetic circuit breaker is recommended for each unit.

Use only AC supplies 90-260V, 50-60Hz.

The unit should never be located in position exposed to rain or in areas of extreme humidity.

A good air ventilation is essential for proper equipment work.



Safety:

The external surface of the unit may exceed 50°C; never handle the unit until at least 5 minutes have elapsed since the unit was turned off.

Never install the unit in an enclosed area lacking sufficient air flow.


The ambient temperature should not exceed 40°C and should not be lower than -10°C.

UNIT DIMENSIONS:

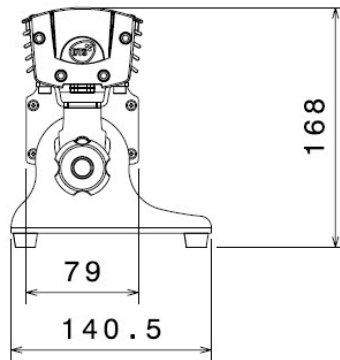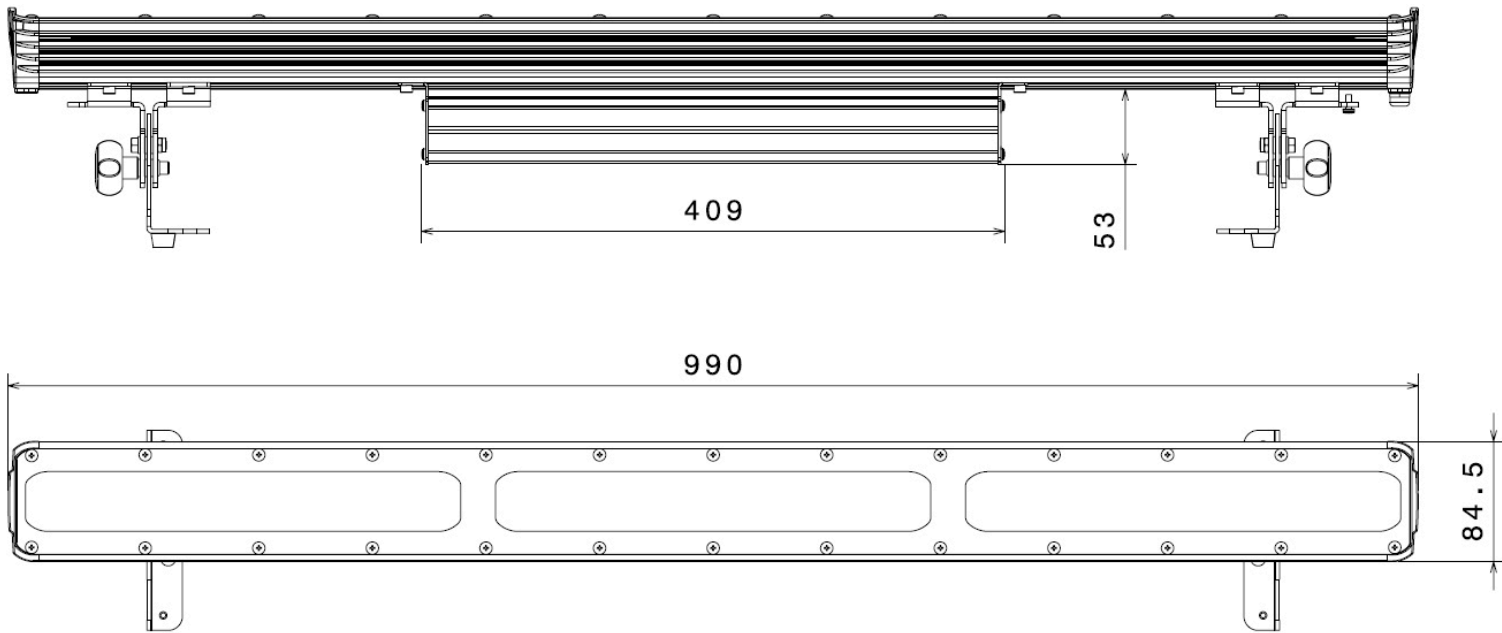

Packing Dimensions
(LxWxH)
1060 x 160 x 200 mm

Weight
7,5 Kg

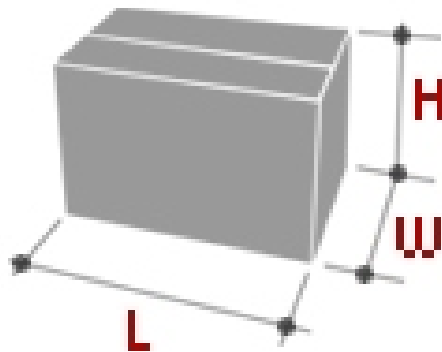


INPUT/OUTPUT CONNECTIONS

FOS 100 DYNAMIC IP20



M12 LED output
Female panel connector

DMX IN/OUT
XLR 5 pins Male / Female
Panel Connectors

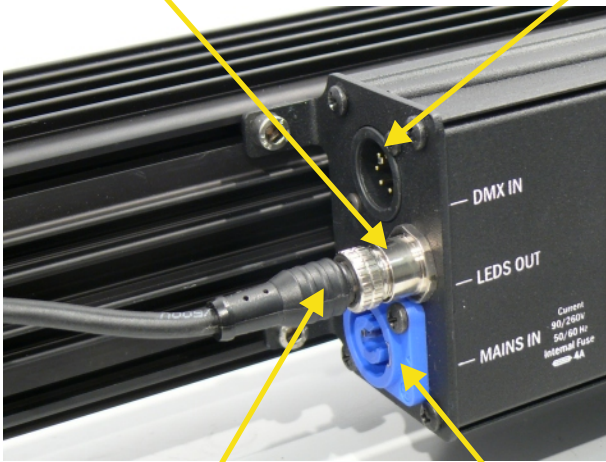



Mains 90-260 V AC
50-60 Hz input Powercon
Female panel connector

Mains 90-260 V AC
50-60 Hz output Powercon
Female panel connector
MAX load:
230 V AC = 20 FOS 100 DYNAMIC
100 V AC = 10 FOS 100 DYNAMIC

**M12 - 5 PINS LED input
Male cable connector**

**M12 - 5 PINS LED output
Female panel connector**

**LEDS
CONNECTOR PINOUT**



- 1 - DMX DATA -
- 2 - GROUND
- 3 - DMX DATA+
- 4 - 24V DC
- 5 - HEARTH

INPUT/OUTPUT CONNECTIONS

FOS 100 DYNAMIC IP65





Mains 90-260 V Ac
50-60 Hz input cable


Mains 90-260 V Ac
50-60 Hz output
ILME 5 pins
Female panel connector
MAX load:
230 V Ac = 20 FOS 100 DYNAMIC
100 V Ac = 10 FOS 100 DYNAMIC

DMX IN
ILME 4 pins Female
Panel Connectors


DMX OUT
ILME 4 pins Female
Panel Connectors

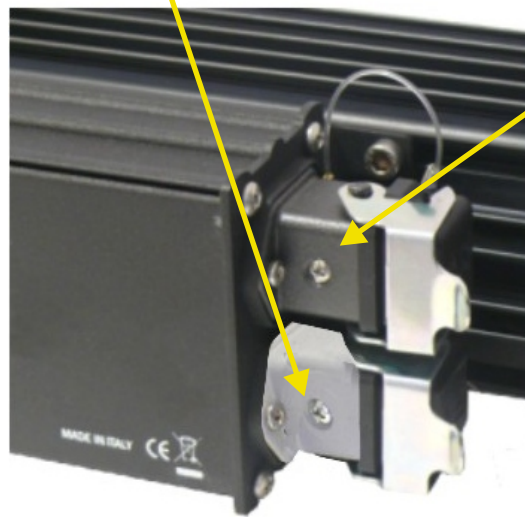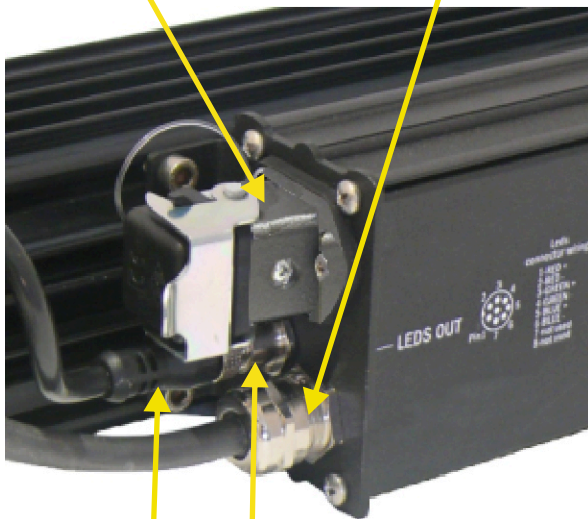

**MAINS OUTPUT
FEMALE PANEL
CONNECTOR**





**DMX IN-OUT
FEMALE PANEL
CONNECTOR**

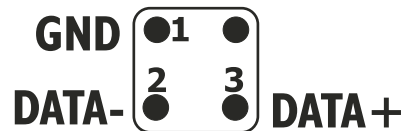

**M12 - 5 PINS LED input
Male cable connector**

**M12 - 5 PINS LED output
Female panel connector**

**LEDS
CONNECTOR PINOUT**



- 1 - DMX DATA -
- 2 - GROUND
- 3 - DMX DATA+
- 4 - 24V DC
- 5 - HEARTH


DMX SIGNAL CONNECTION:

FOS 100 DYNAMIC IP20

The unit operates using a digital DMX 512 signal. Connection between the controller and the unit or between units must be carried out using a two pair screened \varnothing 0.5 mm.

Ensure that the conductors do not touch each other. Do not connect the cable ground to the DMX connector chassis. The plug housing must be isolated. Connect the mixer signal to the DMX IN projector plug and connect it to the next projector by connecting the DMX OUT plug on the first unit to the DMX IN plug of the second one.

In this way, all the projectors are cascade connected.

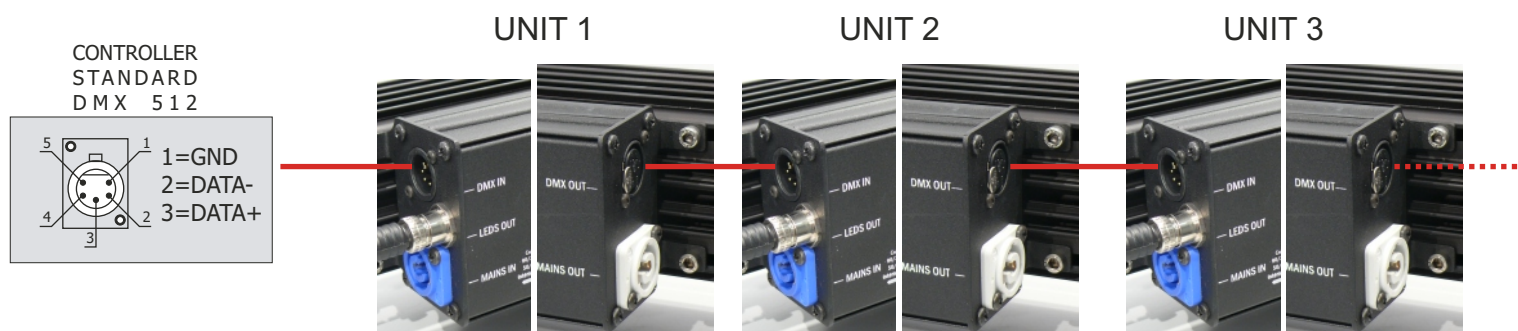


P.S:

If the display showing the DMX address flashes, then one of the following errors has occurred:


- DMX signal not present
- DMX reception problem

For Installations where long distance DMX cable connections are needed, we suggest to use a DMX terminator.

The DMX terminator is a male XLR 3-5 pins connector with a 120 ohm resistor Between pin 2 and 3. The DMX terminator must be plugged into the last unit (DMX out panel connector) of the DMX line.



PLACE A 120 OHM RESISTOR BETWEEN PIN 2 AND 3 OF A MALE XLR CONNECTOR AND PLUG IT INTO THE DMX OUT PANEL CONNECTOR OF THE LAST UNIT CONNECTED TO THE DMX LINE



The standard configuration of the FOS 100 DYNAMIC is with XLR 5 pins connectors.

DMX SIGNAL CONNECTION:

FOS 100 DYNAMIC IP65

The unit operates using a digital DMX 512 signal. Connection between the controller and the unit or between units must be carried out using a two pair screened \varnothing 0.5 mm.

Ensure that the conductors do not touch each other. Do not connect the cable ground to the DMX connector chassis. The plug housing must be isolated. Connect the mixer signal to the DMX IN projector plug and connect it to the next projector by connecting the DMX OUT plug on the first unit to the DMX IN plug of the second one.

In this way, all the projectors are cascade connected.



P.S:


If the display showing the DMX address flashes, then one of the following errors has occurred:

- DMX signal not present
- DMX reception problem

For Installations where long distance DMX cable connections are needed, we suggest to use a DMX terminator.

The DMX terminator is a male DMX cable connector with a 120 ohm resistor Between pin 2 and 3.

The DMX terminator must be plugged into the DMX out panel connector of the last unit connected to the DMX line.

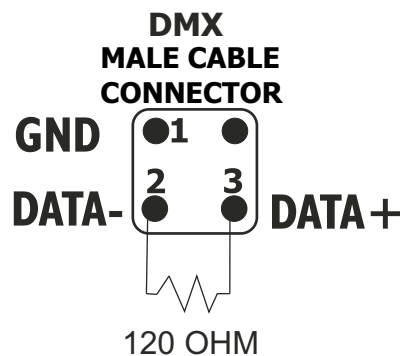

PLACE A 120 OHM RESISTOR BETWEEN PIN 2 AND 3 OF A MALE DMX CONNECTOR AND PLUG IT INTO THE DMX OUT PANEL CONNECTOR OF THE LAST UNIT CONNECTED TO THE DMX LINE

DMX ADDRESS

FOS 100 DYNAMIC can be used in 4 different DMX modes: 10 DMX channels, 14 DMX channels, 4 DMX channels or 60 DMX channels (default).

If you want to use the FOS 100 DYNAMIC in 10 channels mode, select the 10 CH mode from the MODE menu and set the following addresses on the mixer:

Projector 1 A001

Projector 2 A011 If you want to select the next projector, just add "10"

Projector 3 A021

..... A....

projector 6 A051

If you want to use the FOS 100 DYNAMIC in 14 channels mode, select the 14 CH mode from the MODE menu and set the following addresses on the mixer:

Projector 1 A001

Projector 2 A015 If you want to select the next projector, just add "14"

Projector 3 A029

..... A....

projector 6 A071

If you want to use the FOS 100 DYNAMIC in 60 channels mode, select the 60 CH mode from the MODE menu and set the following addresses on the mixer:

Projector 1 A001

Projector 2 A061 If you want to select the next projector, just add "60"

Projector 3 A121

..... A....


projector 6 A301

Selecting the DMX address

- 1) Press the UP-DOWN key until you reach the required DMX address. The numbers on the display will start to flash (but the new DMX address hasn't yet been set).
- 2) Press ENTER to confirm your selection. The numbers on the display will stop flashing and the projector is now controlled by the new DMX address.

TIPS: if you keep pushed the UP or DOWN keys, the channels are calculated more quickly and you get a faster selection.

DISPLAY FUNCTIONS

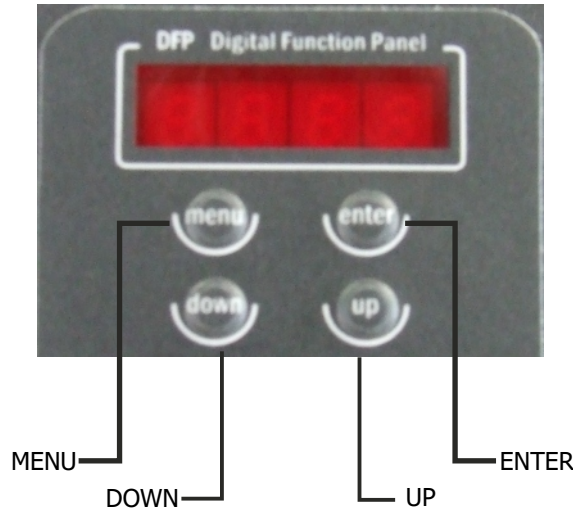

DISPLAY FUNCTIONS

The FOS 100 DYNAMIC display panel shows all the available functions. Using these functions, it is possible to change some of the parameters and add some functions. Changing the D.T.S. setting can vary the functions of the unit so that it does not respond to the DMX 512 signal used to control it. Carefully follow the instructions below before carrying out any variations or selections.

NOTE: the symbol shows which key has to be pushed to obtain the desired function.

Software version 1.08

MENU Up-Down	ENTER Up-Down	ENTER Up-Down	ENTER Up-Down	ENTER
ADD 1	DISP	POS 1	AA	Floor position
<p>REVERSE DISPLAY Reverses display's reading depending on the mounting position (on the ground or suspended).</p>		Up-Down	BB	Suspension position
<p>DISPLAY STAND BY To turn off the display (after 5 seconds) or leave it always on.</p>		ENTER Up-Down	off	Display OFF
		ENTER Up-Down	on	Display always ON

MENU Up-Down	ENTER Up-Down	ENTER	ENTER	CH1 = SHUTTER, CH2 = DIMMER, CH3 = RED, CH4 = GREEN, CH5 = BLUE, CH 6 = AMBER, CH7 = WHITE, CH8 = CTC, CH9 = MACRO, CH10 = FUNCTION
DMX MODE To select DMX mode: 10, 14, 4 or 60 DMX channels (default)	Node	10cH	10 CHANNELS	
	Up-Down	60cH	60 CHANNELS	Default DMX Mode = 60 CH
	Up-Down	4cH	4 CHANNELS	CH1 = RED, CH2 = GREEN, CH3 = BLUE, CH4 = WHITE
	Up-Down	14cH	14 CHANNELS	CH1 = SHUTTER, CH2 = DIMMER, CH3 = RED, CH4 = GREEN, CH5 = BLUE, CH6 = AMBER, CH7 = EFFECT1, CH8 = COLOUR1, CH9 = PARAM1, CH10 = LEVEL1, CH11 = EFFECT2, CH12 = COLOUR2, CH13 = PARAM2, CH14 = LEVEL2



MACRO

MACRO Function, enable channel mapping macro rainbow effects STD (default)



Std

EXT



Standard mode enabled (Default)



Show Custom settings



LED

LED
RGBW Min/Max, Smooth, Compression, Sync and Boost level values settings



rEd



Min

Default = 0



MAX

Default = 100



GrEE



Min

Default = 0



MAX

Default = 100



BLUE



Min

Default = 0



MAX

Default = 100



WHITE



Min

Default = 0



MAX

Default = 100



SMTH



4

Range = Off-20
Default = 4



These settings have priority on Master Dimmer channel

SMOOTH VALUE

This menu allow to select the value of the delay (in milliseconds) for RGB and Dimmer channels reaction to DMX or Program variation.
Off=25 ms delay (Fast response)
20=250 ms delay (Slow response)

COMPRESSION

This menu allow to select between linear current output or quadratic current output for LEDs
Default = Linear

Off = 25 ms
Istant response to DMX variation

20 = 250 ms
Smooth response to DMX variation

SYNC

This menu allow to adjust the PWM frequency value (Hz) in order to reduce flickering in the process of your camera recordings



COMP



Line

Linear = Linear current output



QUAD

Quadratic = Linear light output



BOOST DRIVING

This menu allow to increase the LED's current from 370 mA to 550 mA



54nc



1000

f = 1000 Hz



bSt



On

Boost mode activated



OFF

Boost mode deactivated



With BOOST active, the LED's current is set to 550 mA (30% more gain).
Default = Activated



AUTO

SURF

ChPr

SPEED

00 10

AUTOMATIC MODE

Automatic demo game without DMX controller

ChPr

Chase with 16 steps previously created in REC MODE
Speed and Wait time selectable by user

CUPr

RGBW values selectable by user

Rainbow (rAI n)

Rainbow colours effect.
Speed time selectable by user

CU01-CU16

Color Macros as on DMX channel 8 (Macro)

WHITE MACROS

16 macros for White colour from 2800 to 6500°K

DIMMER

Dimmer level selectable by user as on DMX channel 2 (Dimmer)
Dimmer level is active for all the programs and macros

SHUTTER

Shutter level selectable by user as on DMX channel 1 (Shutter)
Shutter level is active only for CU01/CU16 and Wh01/Wh16 macros

ESC

Exit from Automatic Mode Menu

WAIT 00 10

CUPr RED 120

GREEN 255

BLUE 104

WHITE 255

rAI n SPEED 00 10

CU01

CU02

CU 16

WH01

WH02

WH03

WH04

WH05

WH....

WH 16

DI NN 255

SHUT 255

ESC



REC



10CH



r001

REC MODE

In DMX Recorder Mode, it is possible to create and store the scenes of the ChPr by using an external DMX controller. The unit must be set to 10 channels MODE

r001

r002

r0....

r0 16

DMX Recorder Mode

For the programming of ChPr by using a DMX controller, besides the 10 channels necessary to control the unit a further 3 DMX channels are needed.

So that in RECORDER mode (via DMX) the unit will need 13 channels to be correctly programmed.

The three new DMX channels are:

DMX channel 11 = SCENES channel

From 0-10 = no function (r001)

From 11-255 are displayed the programmable scenes (max 16 scenes from M001 to M0016)

DMX channel 12 = EDIT channel:

-From 0-19 = no function

-From 20-234 the unit runs the configuration given by the received input DMX values.

With the channel SCENES it is possible to pass from one step to the next while with REC it is possible to record the selected scene.

-From 235-255 the unit runs the configuration given by the received input DMX values closing the sequence as last scene.

With the channel REC it is possible to record the selected scene as last scene.

DMX channel 13 = RECORDING channel

Records the set scene with a variation between 0 to 255 (the display flashes indicating that the scene has been recorded). It is advised that you keep the REC channel set to 0 and to run through the 255 only once you have decided to save the scene. If ChPr is not closed, by indicating the last scene (Edit channel between 235-255), in playback mode all 16 scenes will be played through even if not programmed.



SLAVE



SURE



SLU



ESC

SLAVE MODE

Slave mode for ChPr program.

All slave units will be synchronised with master unit, running their own Chpr program.



EMER



SEL



On

**EMERGENCY**

Emergency operating mode.

By setting Emergency mode, it will be possible to select one of the 16 preprogrammed WHITE cues that will then ran if DMX signal is missing or not available.

Usefull for Emergency EXIT illumination on public areas.

OFF

Default = OFF

White



Default = White 1

dinn



Default = 255



DFSE



SURE

**DEFAULT**

To restore default settings



TEMP



T1---

T1, T2 and T3 temperatures
(° Celsius)

TEMPERATURE

T1, T2 and T3 temperatures
visualisation

T2---

T3---



LIFE



red



LIFE TIME

This menu show the total UNIT life time
and the RGBW life time

GREEN

BLUE

WHITE

Unit



TEST



TEST

TEST MODE

RGBW LEDs test with rainbow



SOFT



V1.05

SOFTWARE

Unit software version and LED
driver cards software version

DMX PROTOCOL

60 CHANNELS MODE (Default)

1 RED1
2 GREEN1
3 BLUE1
4 WHITE1
5 RED2
6 GREEN2
7 BLUE2
8 WHITE2

57 RED15
58 GREEN15
59 BLUE15
60 WHITE15

DMX CHANNEL	1	Parameter: RED1
-------------	----------	------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX CHANNEL	2	Parameter: GREEN1
-------------	----------	--------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX CHANNEL	3	Parameter: BLUE1
-------------	----------	-------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX CHANNEL	4	Parameter: WHITE1
-------------	---	--------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour



DMX CHANNEL	57	Parameter: RED15
-------------	----	-------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX CHANNEL	58	Parameter: GREEN15
-------------	----	---------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX CHANNEL	59	Parameter: BLUE15
-------------	----	--------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX CHANNEL	60	Parameter: WHITE15
-------------	----	---------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX PROTOCOL

14 CHANNELS MODE

- 1 SHUTTER**
- 2 DIMMER**
- 3 RED**
- 4 GREEN**
- 5 BLUE**
- 6 WHITE**
- 7 EFFECT 1**
- 8 COLOUR 1**
- 9 PARAM 1**
- 10 LEVEL1**
- 11 EFFECT 2**
- 12 COLOUR 2**
- 13 PARAM 2**
- 14 LEVEL 2**

DMX CHANNEL	1	Parameter: SHUTTER
-------------	----------	---------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-9	5				Black-out
10-19	14				Open
20-29	24				Black-out
30-119					Strobe at variable speed from slow to fast (3,27s-30ms)
120-149					Pulse open at variable speed from slow to fast (42,6s-120ms)
150-179					Pulse close at variable speed from slow to fast (42,6s-120ms)
180-204	192				Random Strobe (Master and RGBW active)
205-229	218				Random Strobe (Full)
230-255	240				Open

DMX CHANNEL	2	Parameter: DIMMER
-------------	----------	--------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional dimmer

DMX CHANNEL	3	Parameter: RED
-------------	----------	-----------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX CHANNEL	4	Parameter: GREEN
-------------	----------	-------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX CHANNEL	5	Parameter: BLUE
-------------	----------	------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX CHANNEL	6	Parameter: WHITE
-------------	----------	-------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX CHANNEL	7	Parameter: EFFECT 1
-------------	----------	----------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
000 - 047	023				NO EFFECT
048 - 063	056				Background
064 - 079	070				Hystogram Left
080 - 095	087				Hystogram Right
096 - 111	104				Hystogram Multicolor Left
112 - 127	120				Hystogram Multicolor Right
128 - 143	136				Continous Shift Right
144 - 159	152				Continous Shift Left
160 - 175	168				Wave Right
176 - 191	184				Wave Left
192 - 207	200				Random Strobo
208 - 223	215				Random Strobo Random Colour
224 - 239	232				Pulse
240 - 255	247				Random Pick

DMX CHANNEL	8	Parameter: COLOUR 1
-------------	----------	----------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Colour Selection

DMX CHANNEL	9	Parameter: PARAM 1			
-------------	----------	---------------------------	--	--	--

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Effect 1 Parameter

DMX CHANNEL	10	Parameter: LEVEL 1			
-------------	-----------	---------------------------	--	--	--

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional Dimmer Effect 1

DMX CHANNEL	11	Parameter: EFFECT 2			
-------------	-----------	----------------------------	--	--	--

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
000 - 047	023				NO EFFECT
048 - 063	056				Background
064 - 079	070				Hystogram Left
080 - 095	087				Hystogram Right
096 - 111	104				Hystogram Multicolor Left
112 - 127	120				Hystogram Multicolor Right
128 - 143	136				Continous Shift Right
144 - 159	152				Continous Shift Left
160 - 175	168				Wave Right
176 - 191	184				Wave Left
192 - 207	200				Random Strobo
208 - 223	215				Random Strobo Random Colour
224 - 239	232				Pulse
240 - 255	247				Random Pick

DMX CHANNEL	12	Parameter: COLOUR 2			
-------------	-----------	----------------------------	--	--	--

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Colour Selection

DMX CHANNEL	13	Parameter: PARAM 2			
-------------	-----------	---------------------------	--	--	--

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Effect 1 Parameter

DMX CHANNEL	14	Parameter: LEVEL 2			
-------------	-----------	---------------------------	--	--	--

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional Dimmer Effect 2

DMX PROTOCOL

10 CHANNELS MODE

- 1 SHUTTER**
- 2 DIMMER**
- 3 RED**
- 4 GREEN**
- 5 BLUE**
- 6 WHITE**
- 7 WHITE PRE-PROGRAMMED**
- 8 CTC**
- 9 COLOURS MACRO**
- 10 FUNCTIONS**

DMX CHANNEL	1	Parameter: SHUTTER
-------------	----------	---------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-9	5				Black-out
10-19	14				Open
20-29	24				Black-out
30-119					Strobe at variable speed from slow to fast (3,27s-30ms)
120-149					Pulse open at variable speed from slow to fast (42,6s-120ms)
150-179					Pulse close at variable speed from slow to fast (42,6s-120ms)
180-204	192				Random Strobe (Master and RGBW active)
205-229	218				Random Strobe (Full)
230-255	240				Open

DMX CHANNEL	2	Parameter: DIMMER
-------------	----------	--------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional dimmer

DMX CHANNEL	3	Parameter: RED
-------------	----------	-----------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX CHANNEL	4	Parameter: GREEN
-------------	----------	-------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX CHANNEL	5	Parameter: BLUE
-------------	---	------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX CHANNEL	6	Parameter: WHITE
-------------	---	-------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX CHANNEL	7	Parameter: WHITE (Pre-programmed White at diff. color temperature)
-------------	---	---

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-55	23				No Function
56-105	80				Full (Red-Green-Blue-White at Full)
106-155	130				White DTS

IF CHANNEL 10 (FUNCTIONS) = CUSTOM WHITE RECALL (Dmx range value 0 - 79)

156-205	180				Custom White Recall
206-255	225				White CTC (Channel 7 CTC enabled 256 color temp. Correction Macros: 2700K-8000K)

IF CHANNEL 10 (FUNCTIONS) = CUSTOM WHITE CREATE (Dmx range value 80 - 160)

156-205	180				Custom White Create (RGB levels selectable by DMX)
206-255	225				White CTC (Channel 7 CTC enabled 256 color temp. Correction Macros: 2700K-8000K)

DMX CHANNEL	8	Parameter: CTC (Color temperature correction)
-------------	---	--

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
-----------------	---------------------	----------------------	------	--------	----------

IF CHANNEL 6 (White) = WHITE CTC (Dmx range value 206 - 255)

0-255	256 color temp. Correction Macros: 0 = 2700K / 128 = 5500K / 255 = 8000°K				
-------	--	--	--	--	--

IF CHANNEL 6 (White) = NO FUNCTION (Dmx range value 0 - 55)

0-255	No Function				
-------	--------------------	--	--	--	--

DMX CHANNEL	9	Parameter: COLOUR MACROS
-------------	---	---------------------------------

IF:  **node**  **MAC**  **Std**  **PLEASE CHECK PAGE 11**

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-14					No Function
15-29					Macro 1
30-44					Macro 2
45-59					Macro 3
60-74					Macro 4
75-89					Macro 5
90-104					Macro 6
105-119					Macro 7
120-134					Macro 8
135-149					Macro 9
150-164					Macro 10
165-179					Macro 11
180-194					Macro 12
195-209					Macro 13
210-225					Macro 14
226-239					Macro 15
240-255					Macro 16

DMX CHANNEL	9	Parameter: COLOUR MACROS
-------------	---	---------------------------------

IF:  **node**  **MAC**  **EHL**  **PLEASE CHECK PAGE 11**

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-14					No Function
15-22					Macro 1
23-30					Macro 2
31-38					Macro 3
39-46					Macro 4
47-54					Macro 5
55-62					Macro 6
63-70					Macro 7
71-78					Macro 8
79-86					Macro 9
87-94					Macro 10
95-102					Macro 11
103-110					Macro 12
111-118					Macro 13
119-126					Macro 14
127-134					Macro 15
135-142					Macro 16

DMX CHANNEL	9	Parameter: COLOUR MACROS
-------------	---	---------------------------------

IF:  **MODE**  **MAC**  **EXT**  **PLEASE CHECK PAGE 11**

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
143-150					Rainbow Speed 1 (1 Sec.)
151-158					Rainbow Speed 2 (5 Sec.)
159-166					Rainbow Speed 3 (10 Sec.)
167-174					Rainbow Speed 4 (20 Sec.)
175-182					Rainbow Speed 5 (30 Sec.)
183-190					Rainbow Speed 6 (60 Sec.)
191-198					Rainbow Speed 7 (120 Sec.)
199-206					Rainbow Speed 8 (180 Sec.)
207-214					Random Speed 1 (0.5 sec.)
215-222					Random Speed 2 (1 Sec.)
223-230					Random Speed 3 (2 Sec.)
231-238					Random Speed 4 (5 Sec.)
239-246					Random Speed 5 (10 Sec.)
247-255					Random Speed 6 (30 Sec.)

DMX CHANNEL	10	Parameter: FUNCTIONS (Recall, Create and Store the Custom white)
-------------	----	---

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-79					Custom White Recall (Enable CH 7 for Custom white Recall)
80-160					Custom White Create (Enable CH 7 for Custom white Creation)
161-255					Custom White Store (Store the Custom White created)

DMX PROTOCOL

4 CHANNELS MODE

- 1 RED**
- 2 GREEN**
- 3 BLUE**
- 4 WHITE**

DMX CHANNEL	1	Parameter: RED
-------------	----------	-----------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX CHANNEL	2	Parameter: GREEN
-------------	----------	-------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX CHANNEL	3	Parameter: BLUE
-------------	----------	------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

DMX CHANNEL	4	Parameter: WHITE
-------------	----------	-------------------------

DMX range Value	Mid point DMX value	Move range (degrees)	Mode	Option	Function
0-255					Proportional colour

NOTE:

The information contained in this publication has been carefully prepared and checked. However, no responsibility will be taken for any errors. All rights are reserved and this document cannot be copied, photocopied or reproduced, in part or completely, without prior written consent from D.T.S.

D.T.S. reserves the right to make any aesthetic, functional or design modifications to any of its products without prior notice. D.T.S. assumes no responsibility for the use or application of the products or circuits described herein.

MADE IN ITALY



The Lighting Company

ISO 9001:2008

D.T.S. quality system
is certified to the
ISO 9001:2008 standard



D.T.S. products are designed
and manufactured at the D.T.S.
plants in Italy



05171128