



CRISTAL EVO



Code **CE24N10EGRT-H**
Short code **CE1313**

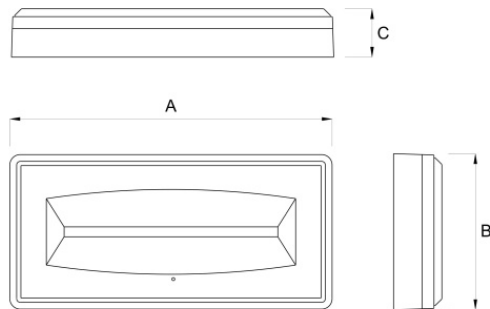

A=380mm B=180mm C=58mm

Luminaire description


- CRISTAL EVO 24W NOT MAINTAINED IP65 ENERGY TEST HF HIGH FLUX

Technical characteristics

- Function: Energy Test (Self-contained with self-diagnosis)
- Duration: 1h
- Type: N/M (Non Maintained)
- Medium flux in emergency: 1000lm
- Minimum flux in emergency (according to EN 60598-2-22): 917lm
- Battery: Ni-Cd 6V 2,5Ah
- Battery type: Nickel Cadmium
- Recharge time: 12h
- Power supply: 230Vac 50-60Hz
- Insulation class: II
- IP protection degree: IP65
- Working temperature: 0°C to +40°C
- Colour: Grey
- Signaling visibility with pictogram (EN 1838): 21 m
- Compliant to European standards: EN 60598-1, EN 60598-2-22, EN 61347-1, EN 61347-2-7, EN 61347-2-13, EN 62031, EN 62384
- Photobiological safety exempt group according to EN 62471
- Compliant to RoHS2 2011/65/UE
- Glow wire 850 °C
- Installation: wall, ceiling, wall recessed box*, drywall recessed*, false-ceiling recessed*, flag-style*, busbar*, 45° bracket* (* with accessory)
- 5 year warranty (please read the Warranty terms)

Light source characteristics

- Type: LED
- Lamps: 40 LED
- Color temperature: 6000K

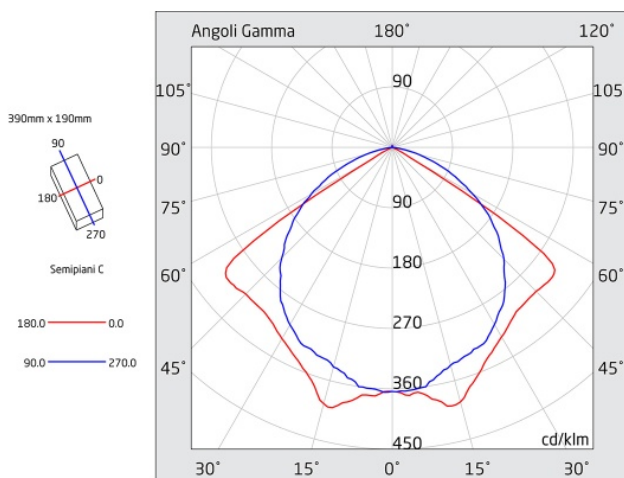

An UNI EN ISO 9001 certified company

LINERGY Srl - Via A. De Gasperi, 9 - 63075 Acquaviva Picena (AP) - ITALY - Tel. +39 0735 5974 - Fax +39 0735 597474 - www.linergy.it - info@linergy.it

Subject to change without notice.2018-A