

RGB20X-NDI-WH

20X NDI Camera

NDI®

Key Features

- High speed optical zoom
- High performance in low light scenarios with Wide Dynamic Range
- Full 1920×1080p HD Resolutions up to 60 frames per second
- 2D & 3D low noise CMOS sensor
- PTZ control via serial, IP or NDI
- H.264, H.265 & MJPEG Streaming
- Stream simultaneously to up to three protocols



Front View



Rear View

Specification

Connectors	Video(Output)	HDMI SDI NDI	1×HDMI-A 1×BNC 1×RJ45
	Audio	Input	1×3.5mm Stereo Jack
	Communication	RS232 (In/Out) RS485 Network	2×DIN 8 1×2 Pin Terminal Connector 1×100Mbps(10/100BASE-TX)
	Power		1×HEC3800 DC Socket
Performance	Camera	Optical Zoom View Angle AV Digital Zoom Minimum Illumination DNR White Balance Focus Aperture/Electronic Shutter BLC WDR Video Adjustment SNR Effective Pixels	20X f=5.5~110mm 3.3°~ 54.7° F1.6 ~ F3.5 10X 0.5lux (F1.8, AGC ON) 2D & 3D DNR Auto / Manual/ One Push/ 3000K/3500K/4000K/4500K/5000K/5500K/6000K/6500K/7000K Auto/Manual Auto/Manual ON/OFF OFF/ Dynamic level adjustment Brightness,Color,Saturation,Contrast,Sharpness,B/W mode,Gamma curve >55dB 2.07m,16:9
	Pan-and-Tilt Parameter	Pan/Tilt Movement Pan/Tilt Control Speed Preset Speed/Quantity	-170°~+170°/-30°~+90° 0.1~60°/S, 0.1~30°/S Pan:60°/S,Tilt:30°/S;Up to 255 preset positions(10 remote control)
	Audio Compression Format	AAC,MP3,G.711A	
	Video Compression Format	H.264, H.265,Dual Streaming Output	
	Output Resolutions	720p25/29.97/30/50/59.94/60 1080p25/30/29.97/30/50/59.94/60	
	Control Protocol	VISCA Pelco-D Pelco-P	
	Baud Rate (bps)	115200 9600 4800 2400bps	
	Network Protocol	NDI RTSP RTMP ONVIF GB/T28181	
	Supported Standards	HDMI SDI NDI	1.3 SMPTE 425M (Level A & B) SMPTE 424M SMPTE 292M SMPTE 259M-C DVB-ASI NDI HX low bandwidth version
	Power	Input Voltage	DC12V/1.5A
		Max Power	12W
	Environment	Temperature	-10℃~50℃
		Humidity	20%~80%
	Physical	Weight	Net 1.4kg
		Dimension	Net 150mm×150mm×167.5mm

Order Codes

Product Code	Item
981-0011-04-0	RGB20X-NDI-WH 20X NDI Camera


* There is no standard bracket for this PTZ. If necessary, please contact RGBlink sales for additional orders.

Tel: +86-592-5771197 | Fax: +86-592-5788216 | E-mail: sales@rgbink.com

Headquarter: S601 Weiye Building,Torch Hi-Tech Development Zone,Xiamen,Fujian,P.R.C.

Specifications are correct at time of printing and subject to change or alteration without notice.

Dimension

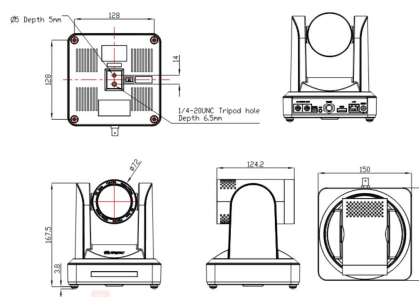

RGBlink®
www.rgbink.com

